

Figure 1: Conventional Telephone Line Interface /C

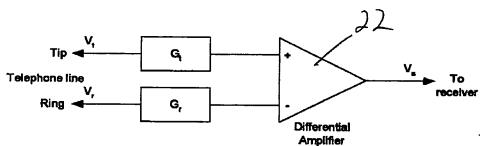



Figure 2: Block diagram of solld state DAA receiver

20



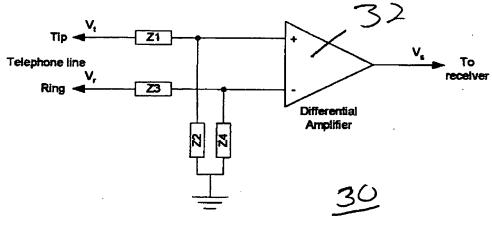


Figure 3: DAA receiver circuit

ı efi

إيايا

I,F

1,5

j. di.

. ±.

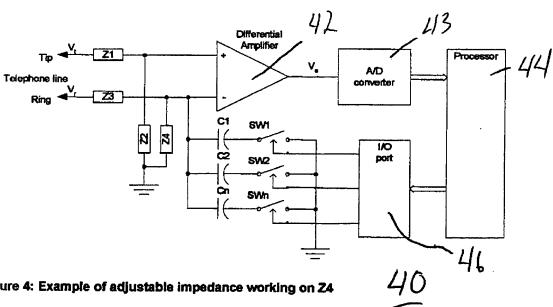


Figure 4: Example of adjustable impedance working on 24